

UPHOLSTERED VALANCE




Installation & Care Instructions

152147
1/12/2017


GETTING STARTED

A few simple tools are required:

- Measuring tape
- Power drill, drill bits
- 1/4" Hex head and/or Phillips driver bit
- Pencil

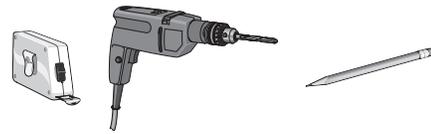

Additional fasteners other than those sent with your shading may be required depending on the mounting surface. Wallboard and plaster require the use of anchors such as expansion or toggle bolts. Brick, tile or stone need special plugs and drill bits. Remember to always pre-drill holes in wood to avoid splitting.

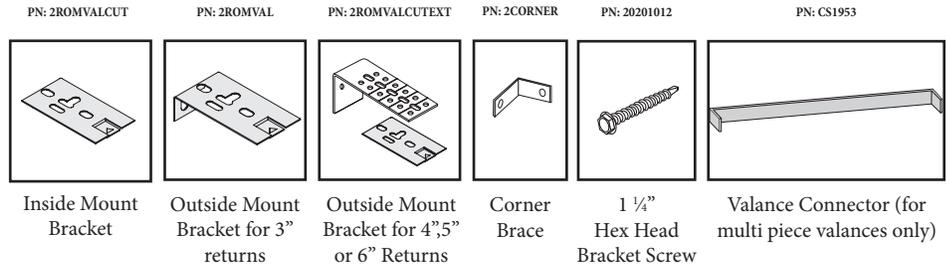


STEP 1: VALANCE ASSEMBLY

KEYSTONE (IF VALANCE IS MORE THAN ONE PIECE)

Lay valance pieces out on a flat surface end to end as shown.


Insert valance connector into the lower plastic extrusion pieces.

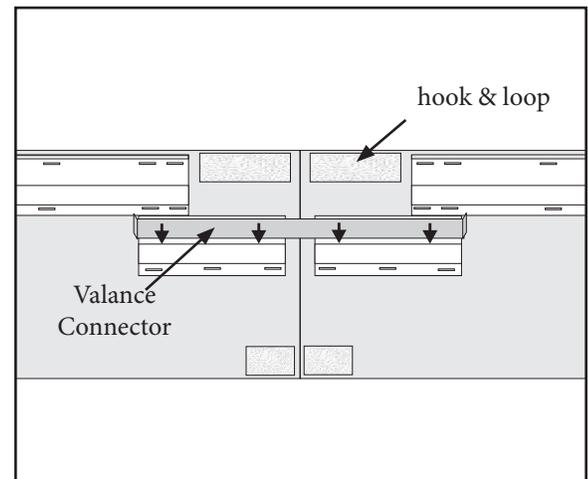

Slide the fabric keystone under the valance with the widest part at the top.



Fold the top fabric flap down onto the hook & loop and press to adhere.

Pull gently on the bottom of the keystone to remove any puckers or wrinkles. Fold fabric flap over and press to adhere.

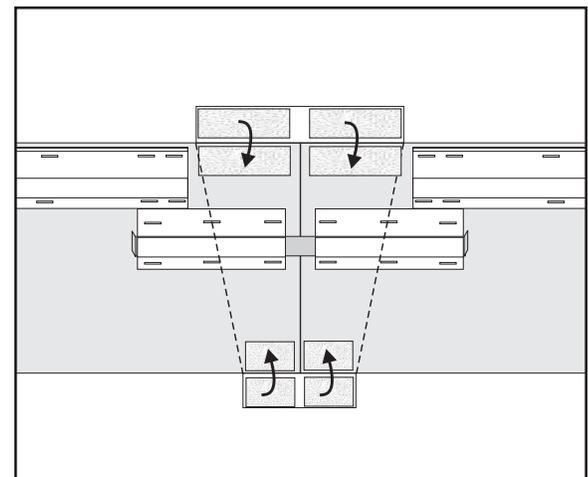


RETURNS

Fold returns and insert the corner brace into the white plastic extrusion to secure.

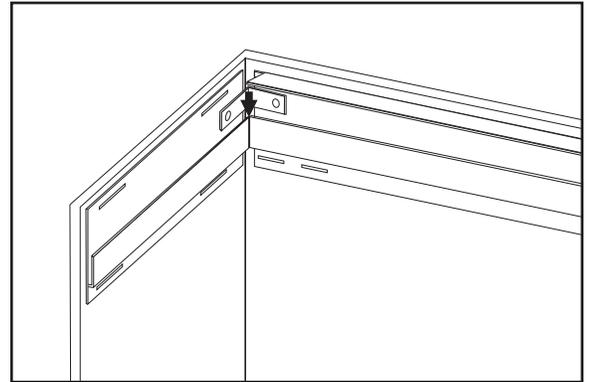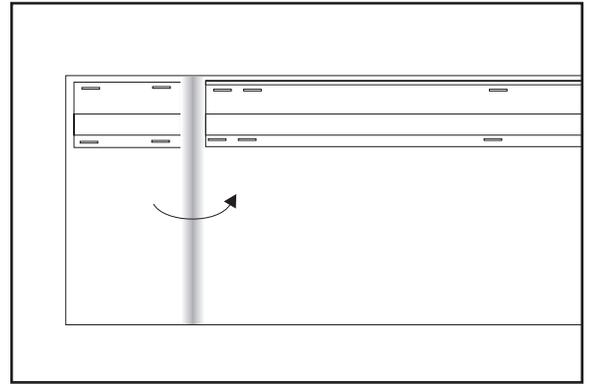

STEP 2: DETERMINE BRACKET PLACEMENT


If your valance requires the 2 piece bracket, bolt the pieces together at the correct position for your return size (images at right).

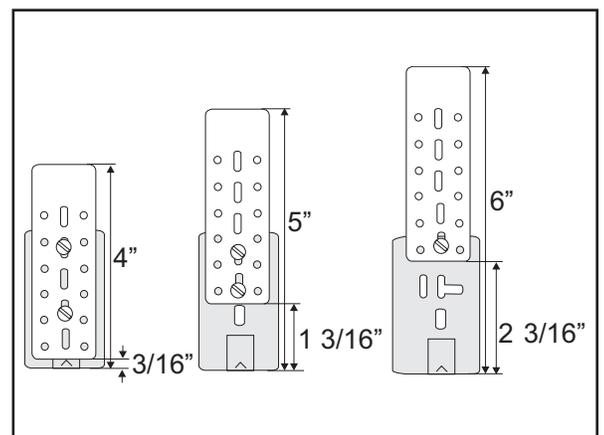

Slide the installation brackets onto the valance as shown.

Hold the valance at the desired location and mark the bracket height for an outside mount or depth for an inside mount.


Remove the brackets from the valance.

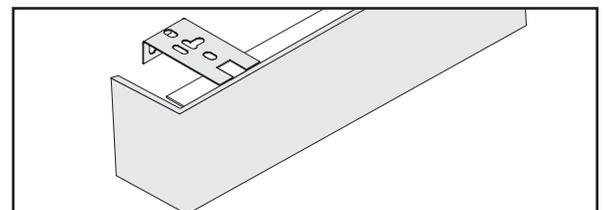


STEP 3: BRACKET INSTALLATION

Install your brackets either **inside**, **outside** or **nested** with your shade brackets.


It is often possible to nest the valance bracket with your window treatment bracket. Check to make sure that the holes will align before installing in this manner.

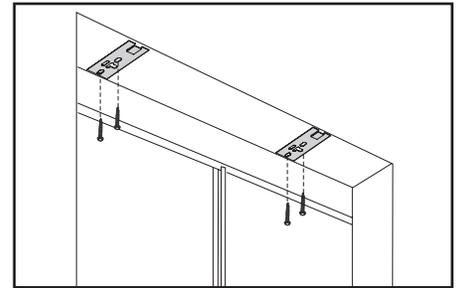

Inside Mount

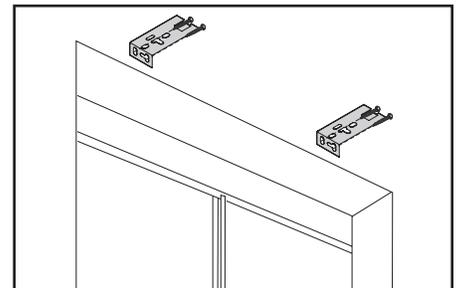

Outside Mount

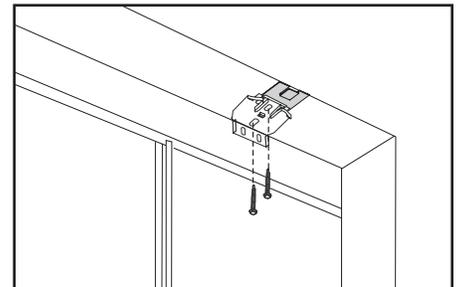

Nested Brackets

STEP 4: VALANCE INSTALLATION

Center the valance and press it onto the valance brackets.

Press firmly to secure it in place.

